

MODEL	DIMENSIONS													CONNECTIONS <NPT>	INLET AIR FLOW <scfm>	NET WEIGHT <lbs>	POWER SUPPLY	REFRIGERANT
	A	B	C	D	E	F	G	H	I	J	K	L	M					
HGEN600	32.25 {819.2}	21.75 {552.4}	50.44 {1281.3}	4.86 {123.5}	7.94 {201.6}	3.23 {82}	26.74 {679.2}	20.24 {514}	20.47 {520}	4.18 {106.2}	40.94 {1040}	49.26 {1251.2}	10.12 {257}	2"	600	344	460V/3PH/60Hz	R407c

NOTE: PRIMARY DIMENSIONS ARE INCHES
& DIMENSIONS IN BRACES ARE METRIC

SERVICE :
COMPRESSED AIR


OPERATING CONDITIONS :
 RATED INLET AIR PRESSURE- 100 PSIG
 MAXIMUM INLET AIR PRESSURE- 232 PSIG
 MINIMUM INLET AIR PRESSURE- 43.5 PSIG
 RATED INLET AIR TEMPERATURE- 100°F
 MAXIMUM INLET AIR TEMPERATURE- 120°F
 MINIMUM INLET AIR TEMPERATURE- 45°F
 RATED AMBIENT AIR TEMPERATURE- 86°F
 MAXIMUM AMBIENT AIR TEMPERATURE- 109°F
 MINIMUM AMBIENT AIR TEMPERATURE- 37°F

SPECIFICATIONS:
 CONDENSER TYPE- AIR COOLED
 DRAIN TYPE -ELECTRONIC AUTO DRAIN VALVE
 EXPANSION DEVICE- CONSTANT PRESSURE EXPANSION VALVE

B

→

A

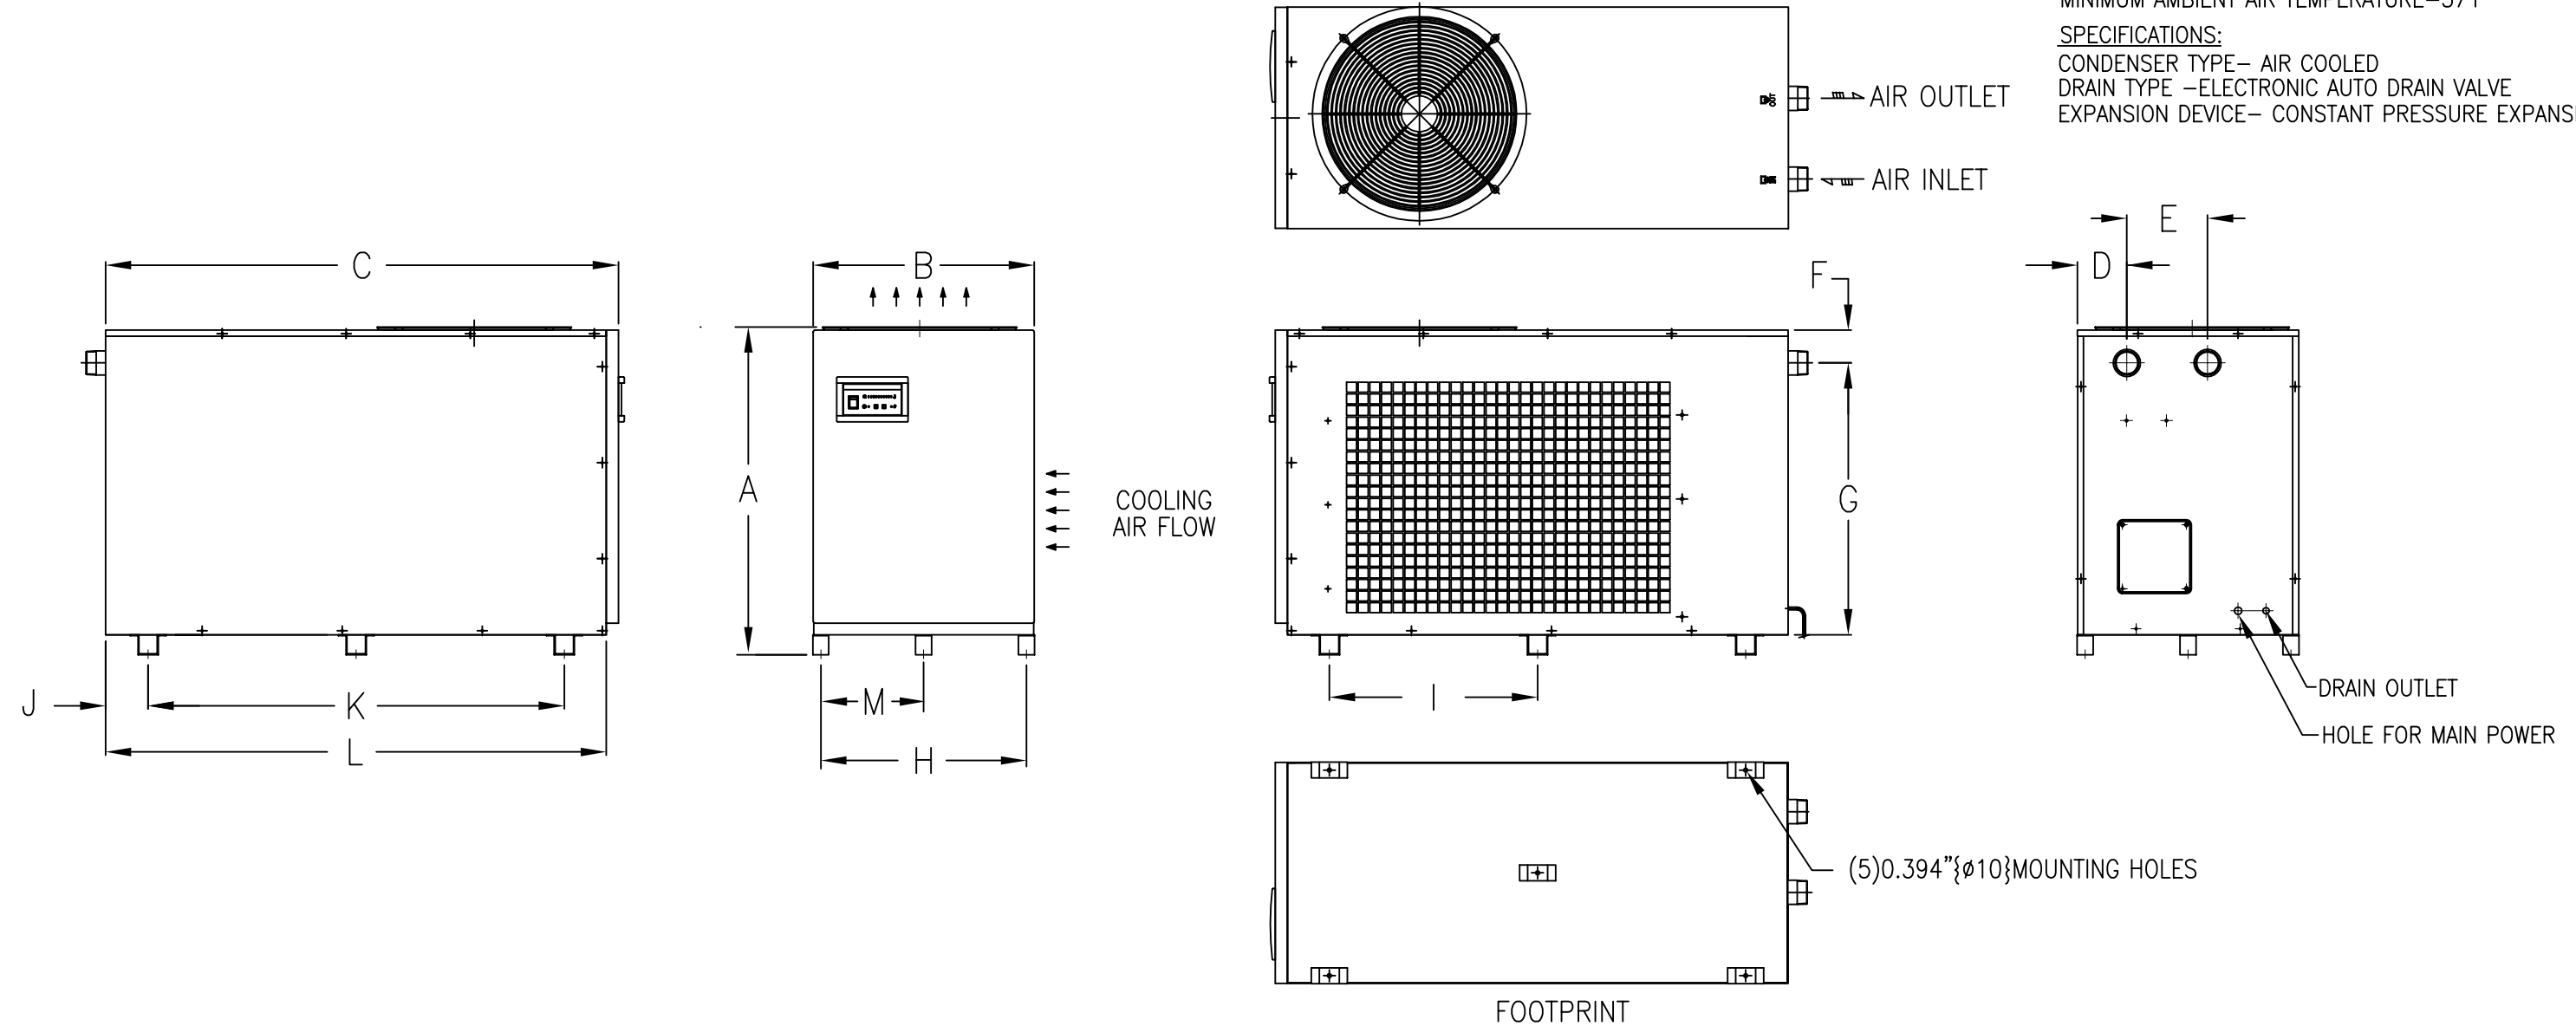

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON FRACTIONS: ± 1/16 TOL. ON DECIMALS: ± .03 (2 PLACE) TOL. ON DECIMALS: ± .015 (3 PLACE) TOL. ON ANGLES: ± 1.5	DRAWN BY: NLC DATE: 1/26/17	GENERAL ARRANGEMENT HGEN600 - AIR COOLED			
					THIRD ANGLE PROJECTION	CHECKED BY: NLC DATE: 1/26/17	APPROVED BY: NLC DATE: 1/26/17	SIZE B	DWG. NO. GA03DEL-0056	REV.
REV.	DESCRIPTION	BY	DATE	APPROVED				SCALE: NONE	EST. WT.	SHEET 1 OF 1
REVISION HISTORY (INDICATES LATEST REVISION)										