



Table			
FILTER TYPE	3-06	3-07	3-08
REPLACEMENT ELEMENT	3(GRADE)-06	3(GRADE)-07	3(GRADE)-08
NOMINAL FLOW	75 (131)	103 (175)	157 (267)
IN/OUT CONN. NPT (BSPT)	3/4	3/4	1
"A" IN. (mm)	5.20 (132)	5.20 (132)	5.20 (132)
"B" IN. (mm)	10.32 (262.1)	10.32 (262.1)	12.84 (326.1)
"C" IN. (mm)	8.65 (219.8)	8.65 (219.8)	11.7 (283.8)
"D" IN. (mm)	5 (127)	5 (127)	5 (127)
WEIGHT lb. (kg.)	3.1 (1.4)	3.1 (1.4)	3.5 (1.6)
MWP psig. (bar)	250 (17.3)	250 (17.3)	250 (17.3)
MOT F (C)	150 (66)	150 (66)	150 (66)
HEAD MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM
BOWL MATERIAL	ALUMINUM	ALUMINUM	ALUMINUM

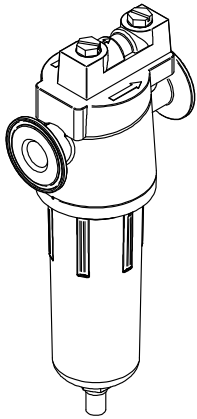

- NOTES:
1. MWP - MAXIMUM WORKING PRESSURE
 2. MOT - MAXIMUM OPERATING TEMPERATURE
 3. 3-06 & 3-07 FILTER ASSEMBLY WITH SLIDER AND AUTOMATIC FLOAT DRAIN SHOWN
 4. 3-08 FLITER ASSEMBLY SHOWN WITH DP GAUGE AND AUTOMATIC FLOAT DRAIN

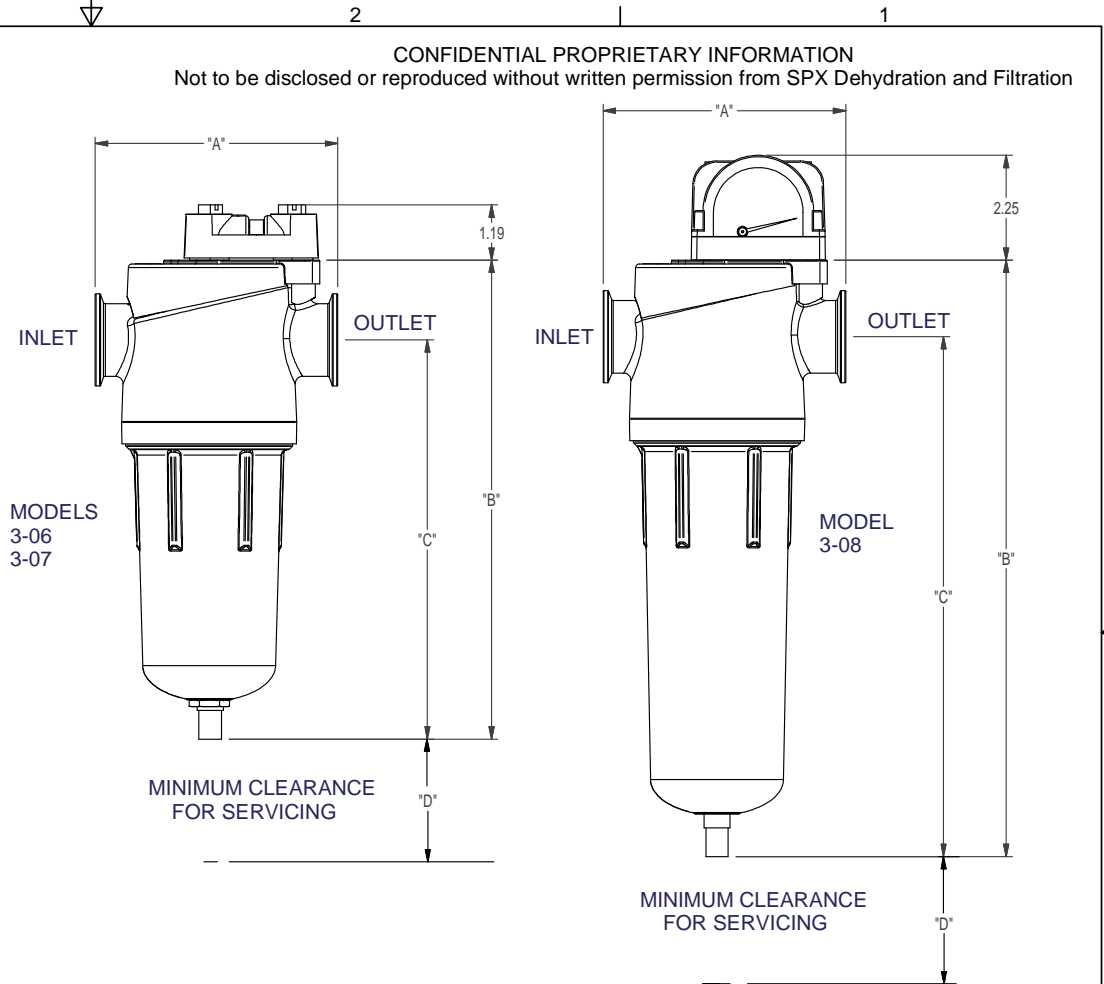

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL. ON FRACTIONS: ± TOL. ON DECIMALS: ± (2 PLACE) TOL. ON DECIMALS: ± (3 PLACE) TOL. ON ANGLES: ±	DRAWN BY: JWB DATE: 6/3/2010	SPX		
					THIRD ANGLE PROJECTION	CHECKED BY: JWB DATE: 6/3/2010	TITLE DELTECH GENERAL ARRANGEMENT 3-06 3-07 & 3-08		
REV.	DESCRIPTION	BY	DATE	APPROVED		APPROVED BY: JWB DATE: 6/3/2010	SIZE B	DWG. NO. GA23DEL-0003	REV.
REVISION HISTORY (△ INDICATES LATEST REVISION)						SCALE: NONE EST. WT.:		SHEET 1 OF 1	