


TOP VIEW

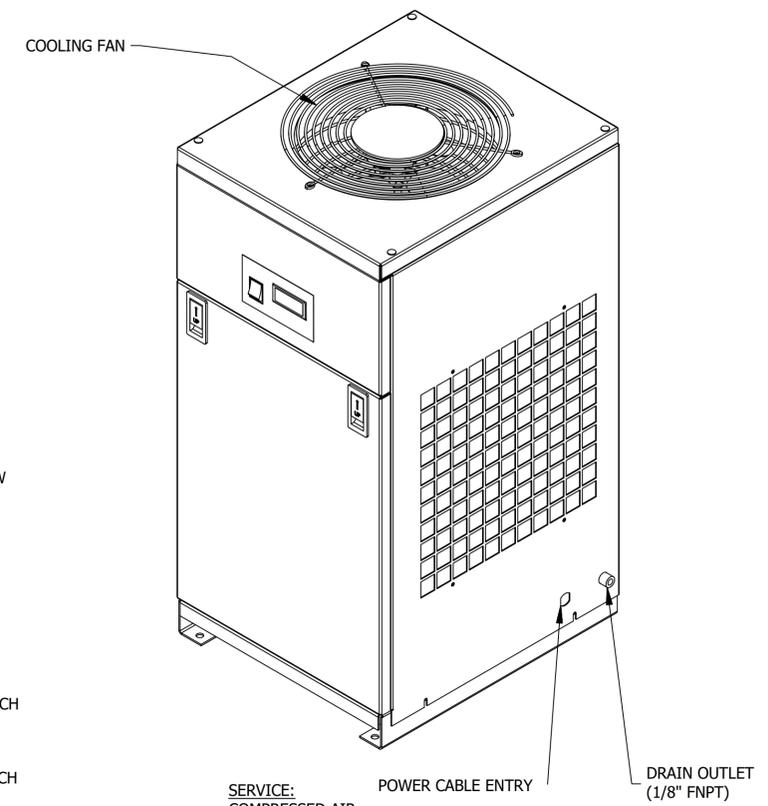


SERVICE: COMPRESSED AIR

**DRYER INFORMATION:**  
 INLET AIR FLOW: 25 SCFM | 0.7 Nm<sup>3</sup>/min  
 CONNECTIONS: 3/4" MNPT  
 DRAIN CONNECTION: 1/8" FNPT  
 REFRIGERANT: R134A  
 ELECTRICAL: 115V/1PH/60Hz  
 WEIGHT: 93.71 LBS. / 42.5 KG


**OPERATING CONDITIONS:**  
 RATED INLET AIR PRESSURE: 125 PSIG / 8.6 BARG  
 MAXIMUM INLET AIR PRESSURE: 227 PSIG / 15.7 BARG  
 MINIMUM INLET AIR PRESSURE: 42 PSIG / 3 BARG  
 RATED INLET AIR TEMPERATURE: 180°F / 82°C  
 MAXIMUM INLET AIR TEMPERATURE: 180°F / 82°C  
 MINIMUM INLET AIR TEMPERATURE: 40°F / 4°C  
 RATED AMBIENT AIR TEMPERATURE: 95°F / 35°C  
 MAXIMUM AMBIENT AIR TEMPERATURE: 110°F / 43°C  
 MINIMUM AMBIENT AIR TEMPERATURE: 40°F / 4°C  
 RATED/MAXIMUM PRESSURE DEW POINT: 160°F / 71°C

**SPECIFICATIONS:**  
 CONDENSER TYPE: AIR COOLED  
 DRAIN TYPE: ELECTRONIC AUTO DRAIN VALVE  
 EXPANSION DEVICE: EXPANSION VALVE


- NOTES:**
- THIS DRAWING ALONG WITH THE MANUAL PROVIDES OPERATING CONDITIONS, SPECIFICATIONS, INSTALLATION, MOUNTING, AND CONNECTION REQUIREMENTS. READ THE MANUAL PRIOR TO INSTALLATION.
  - INSTALL IN A CLEAN, WELL VENTILATED AREA TO REDUCE DIRT AND DUST ON THE CONDENSER COILS.
  - FOR COOLING AIR FLOW AND MAINTENANCE PURPOSES, RECOMMENDED CLEARANCE AROUND UNIT IS 2 FEET [609.6 MM].
  - INSTALLATION CONSTRAINTS. ON-SITE ASSEMBLY OF PIPING, TUBING AND/OR ELECTRICAL CONNECTIONS, ARE THE RESPONSIBILITY OF THE CUSTOMER/OWNER.

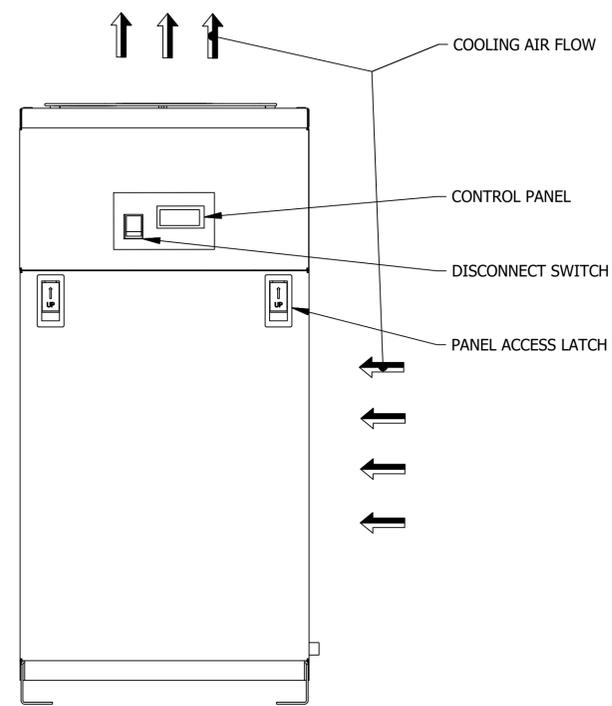


FRONT VIEW

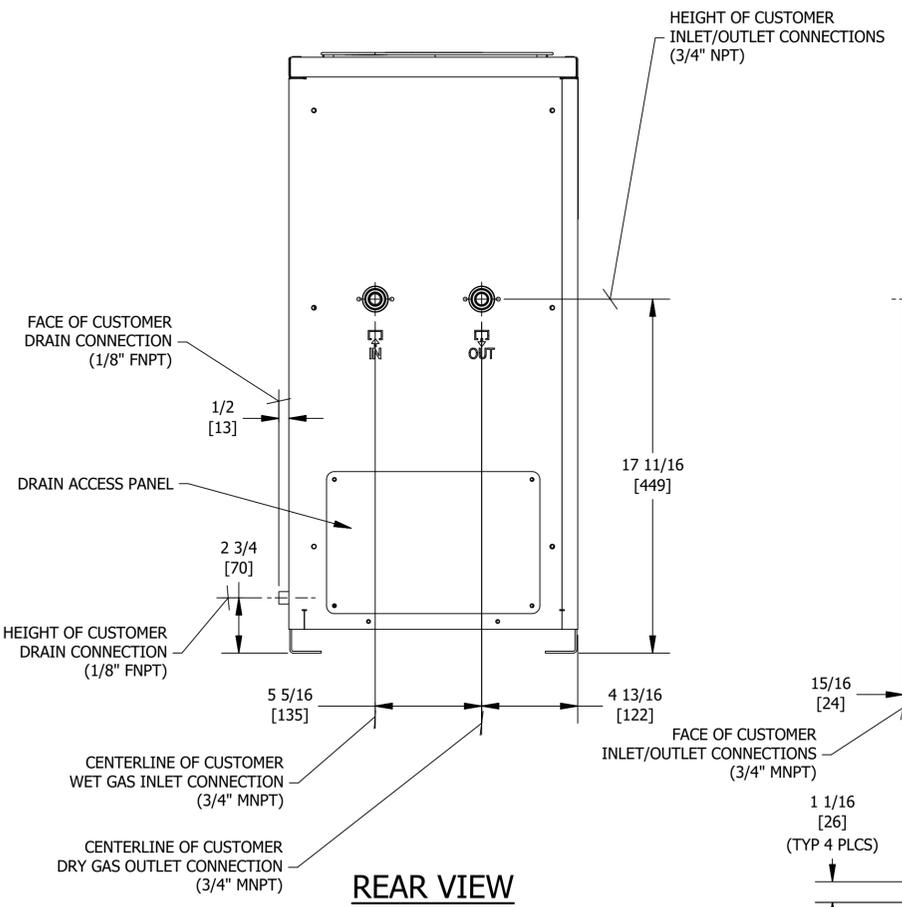

REAR VIEW

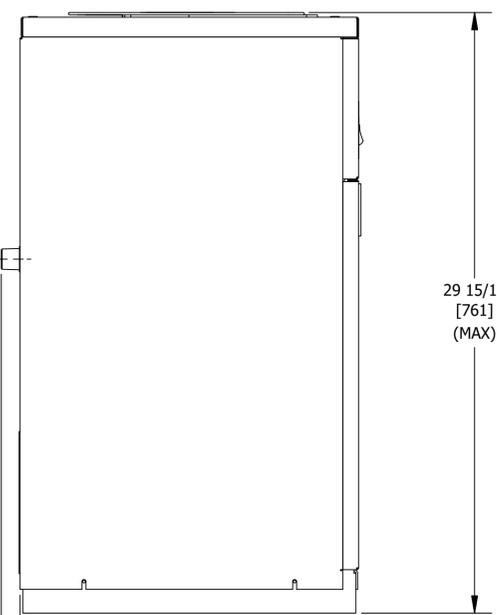

SIDE VIEW

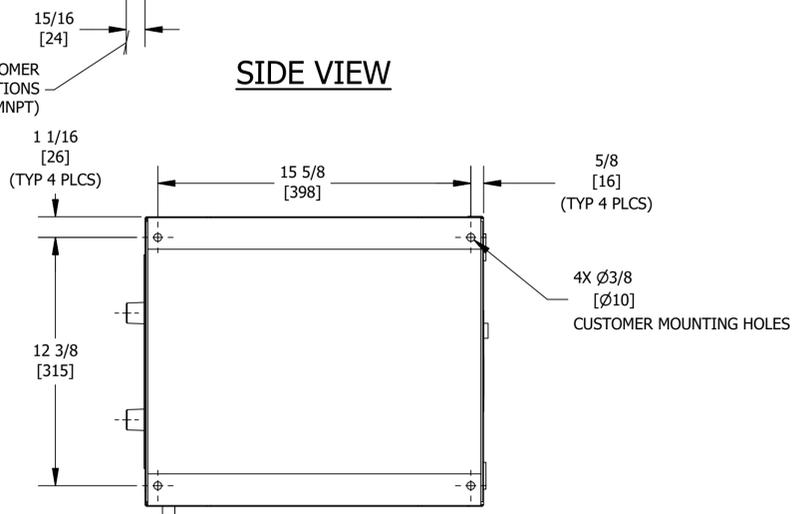

FOOT PRINT

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	UNAUTHORIZED USE, MANUFACTURE, OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED. DRAWING DESIGN AND OTHER DISCLOSURES ARE PROPERTY OF:
DIMENSIONS ARE IN: INCHES (MM)		DWN BY	CRH	
SURFACE FINISH: N/A		ENG BY	BJM	10/30/2019
TOL.	MM	INCHES	CHK BY	AGT
.X			APP BY	BJM
.XX			REL BY	MDB
.XXX				
FRACT: ±1/2	ANG: ±2°	MATERIAL:		SIZE: D
SCALE: 7/32		DWG NO: GA03DEL-0206		REV: 1/1

**Deltech**  
 \*DO NOT SCALE. USE DIMENSIONS ONLY\*  
**GENERAL ARRANGEMENT**  
 HTDN 25