


TOP VIEW

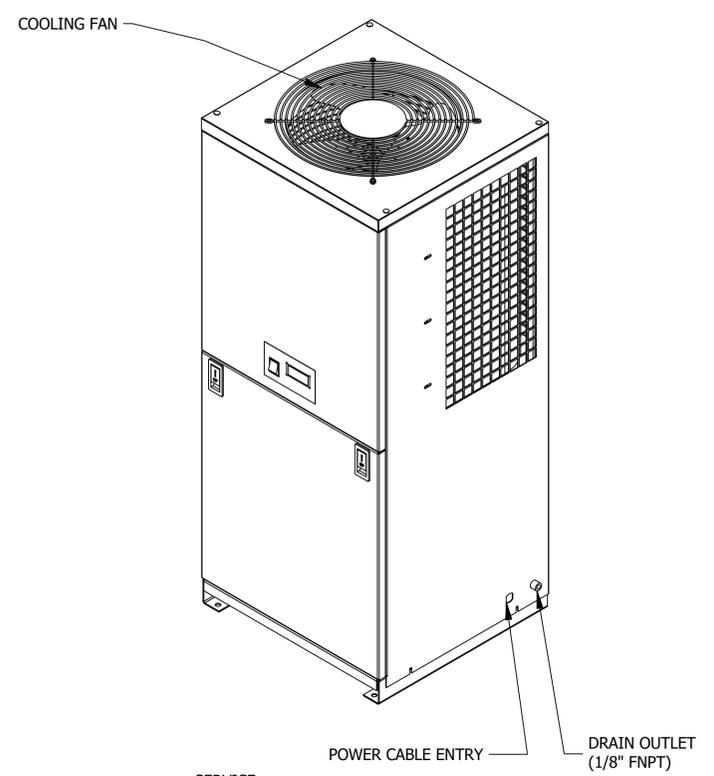


SERVICE:  
COMPRESSED AIR

DRYER INFORMATION:  
INLET AIR FLOW: 75 SCFM | 2.0 Nm<sup>3</sup>/min  
CONNECTIONS: 1" MNPT  
DRAIN CONNECTION: 1/8" FNPT  
REFRIGERANT: R407C  
ELECTRICAL: 115V/1PH/60Hz  
WEIGHT: 123.5 LBS. / 56 KG


OPERATING CONDITIONS:  
RATED INLET AIR PRESSURE: 125 PSIG / 8.6 BARG  
MAXIMUM INLET AIR PRESSURE: 227 PSIG / 15.7 BARG  
MINIMUM INLET AIR PRESSURE: 42 PSIG / 3 BARG  
RATED INLET AIR TEMPERATURE: 180°F / 82°C  
MAXIMUM INLET AIR TEMPERATURE: 180°F / 82°C  
MINIMUM INLET AIR TEMPERATURE: 40°F / 4°C  
RATED AMBIENT AIR TEMPERATURE: 95°F / 35°C  
MAXIMUM AMBIENT AIR TEMPERATURE: 110°F / 43°C  
MINIMUM AMBIENT AIR TEMPERATURE: 40°F / 4°C  
RATED/MAXIMUM PRESSURE DEW POINT: 160°F / 71°C

SPECIFICATIONS:  
CONDENSER TYPE: AIR COOLED  
DRAIN TYPE: ELECTRONIC AUTO DRAIN VALVE  
EXPANSION DEVICE: EXPANSION VALVE

- NOTES:
- THIS DRAWING ALONG WITH THE MANUAL PROVIDES OPERATING CONDITIONS, SPECIFICATIONS, INSTALLATION, MOUNTING, AND CONNECTION REQUIREMENTS. READ THE MANUAL PRIOR TO INSTALLATION.
  - INSTALL IN A CLEAN, WELL VENTILATED AREA TO REDUCE DIRT AND DUST ON THE CONDENSER COILS.
  - FOR COOLING AIR FLOW AND MAINTENANCE PURPOSES, RECOMMENDED CLEARANCE AROUND UNIT IS 2 FEET [609.6 MM].
  - INSTALLATION CONTRAINTS. ON-SITE ASSEMBLY OF PIPING, TUBING AND/OR ELECTRICAL CONNECTIONS, ARE THE RESPONSIBILITY OF THE CUSTOMER/OWNER.

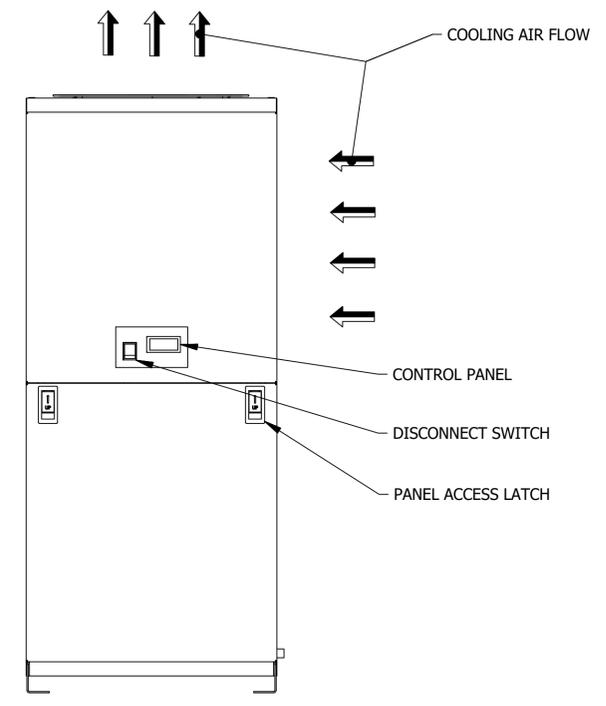


FRONT VIEW

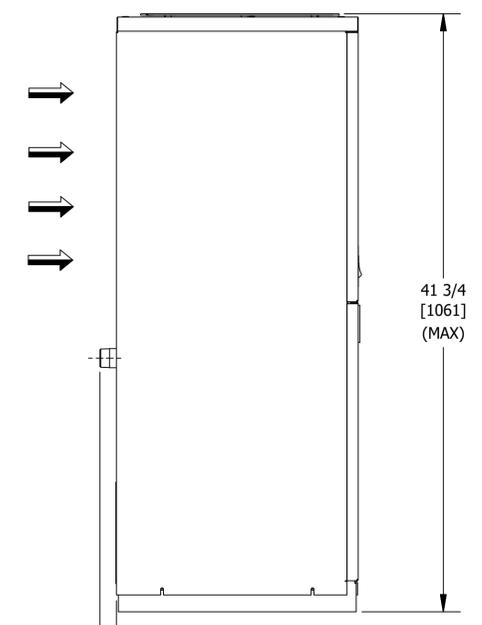


SIDE VIEW

FACE OF CUSTOMER INLET/OUTLET CONNECTIONS (1" MNPT)

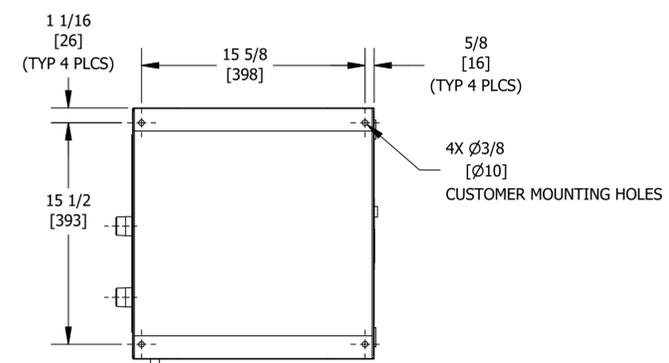

FOOT PRINT

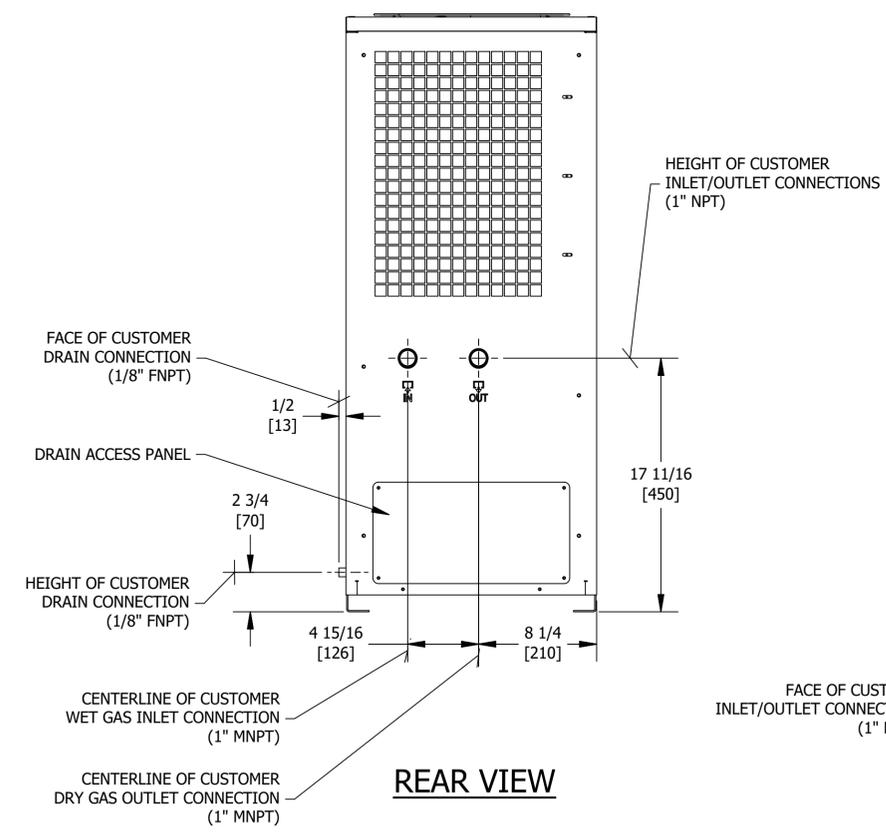

REAR VIEW

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	UNAUTHORIZED USE, MANUFACTURE, OR REPRODUCTION IN WHOLE OR IN PART IS PROHIBITED. DRAWING DESIGN AND OTHER DISCLOSURES ARE PROPERTY OF:		
DIMENSIONS ARE IN: INCHES (MM)		DWN BY	CRH	10/30/2019	<p>GENERAL ARRANGEMENT HTDN 75</p>	
SURFACE FINISH: N/A		ENG BY	BJM	10/30/2019		
TOL.	MM	INCHES	CHK BY	AGT		10/30/2019
.X			APP BY	BJM		10/30/2019
.XX			REL BY	MDB		10/30/2019
.XXX						
FRACT: ±1/2	ANG: ±2°	MATERIAL:		SIZE	DWG NO:	
SCALE: 5/32				D	GA03DEL-0209	